
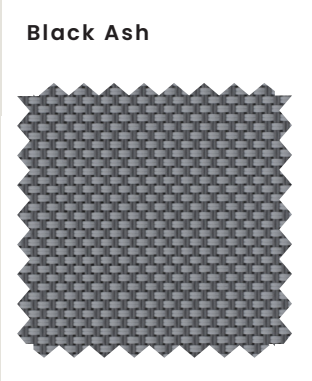
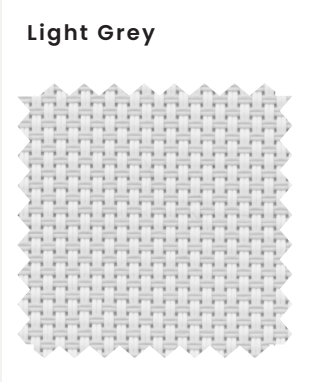
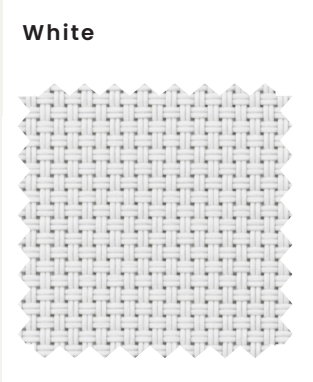
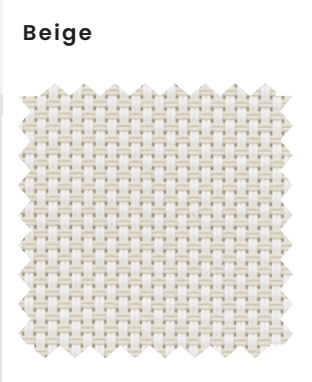
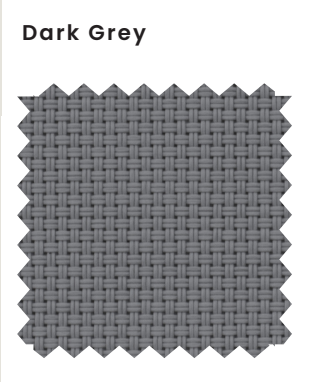
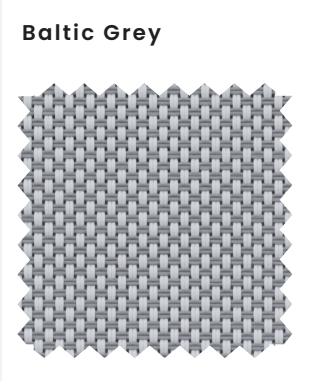
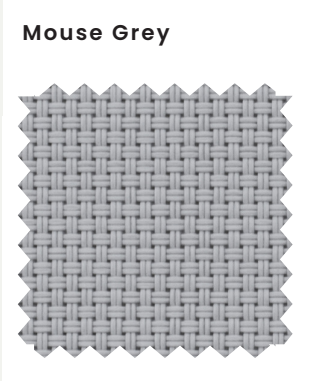
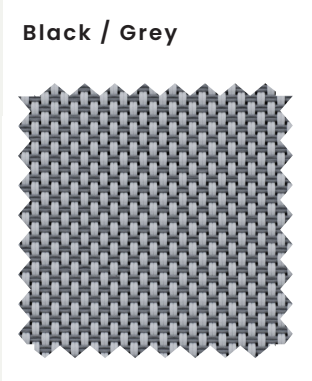
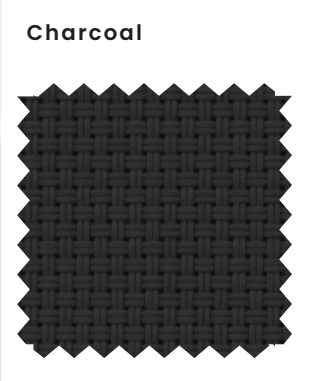


romano 3% screen vision

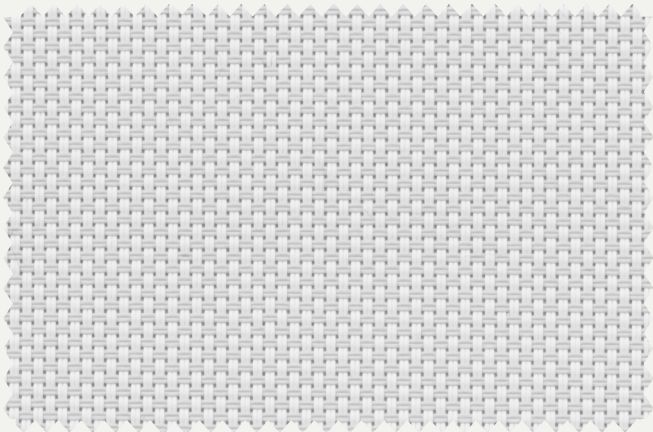

romano 3% screen vision

About the fabric

Pattern:	Basket weave 2 / 2
Composition:	75% PVC / 25% PES
Weight (gsm):	450
Thickness (mm):	0.57
Width (mm):	Roller 2500 & 3000 / Vertical 89
Colour fastness:	>7 (ISO105 B02)
Flame retardant:	Yes
Health & safety:	Greenguard / Greenguard gold / Oekotex / Reach compliant
Micro organism:	STME2180 / ASTM G21
Cleaning:	Remove dust from the fabric surface, then wipe gently with a damp soft sponge with mild detergent
Tensile Strength (daN/5cm):	Warp 175 / Weft 175
Tearing Strength (daN):	Warp 8 / Weft 7

Additional information

Colour	OF	Ts(%)	Rs(%)	As(%)	Tuv	Tv	Gtot	Fc	Thermal comfort	Glare control	Privacy at night	Visual contact to outside	Daylight utilisation
White	3%	19	71	10	3	16	0.34	0.57	2	0	1	2	1
Beige	3%	16	62	22	6	15	0.36	0.61	1	1	2	1	1
Light grey	3%	11	49	40	4	9	0.39	0.67	1	2	2	2	1
Mouse grey	3%	8	32	60	4	6	0.49	0.75	1	3	2	2	1
Charcoal	3%	5	4	91	4	4	0.52	0.88	0	3	2	2	0
Dark grey*	3%	6	15	79	5	6	0.49	0.83	1	1	1	3	0
Black ash*	3%	5	9	86	4	5	0.50	0.85	0	3	2	2	0
Baltic grey	3%	8	38	54	4	7	0.42	0.72	1	1	1	3	1
Black grey*	3%	6	16	78	3	7	0.48	0.82	1	3	2	2	0

of: openness factor / Ts: Solar Transmittance / Rs: Solar Reflectance / As: Solar Absorbance / Tuv: UV Transmittance / Tv: Visible Light Transmittance / Measurement according to EN410, Glass Type C.

Technical data subject to change.

* Not available in verticle



SHOWROOM

THE BANKING HALL, 74 GOSWELL RD,
CLERKENWELL, LONDON EC1V 7DA

HEAD OFFICE

WICKENS PLACE, GODSTONE HILL,
GODSTONE, RH9 8AP